

SPECIFICATIONS

MATERIAL:

1. Housing : PBT Polyester UL94V0
2. Color : Black
3. Contacts : 0.35mm Thickness Alloy Selective Gold Plating



ELECTRICAL:

1. Current Rating : 1.5 AMP MAX
2. Voltage Rating : 150 VAC MAX
3. Contact Resistance : 30 milliohms MAX, initial
4. Insulation Resistance : 500 Megohms MIN
5. Dielectric Withstanding Voltage : 1000 VAC, 1min

UL. CUL NO.: E166003

Ordering Information

- 310-XXX2-100X1
- No. of Positions: 4,6,8,1(10P)
 - Panel Stop: 0 - W/O Panel Stop
 - 1 - W/Panel Stop
 - No. of Contacts: 2,4,6,8,1(10C)
 - Gold Plating:
 - 2 - 6u"
 - 3 - 15u"
 - 4 - 30u"
 - 5 - 50u"

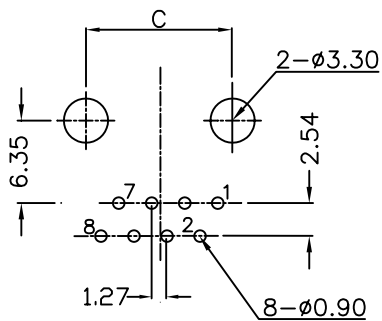

PCB LAYOUT/TOP VIEW

No. of Positions	Dimensions m/m		
	A	B	C
4	13.55	11.10	7.62
6	15.60	13.10	10.16
8/10	17.64	15.20	11.43

.X ±0,3	UNITS mm	DWG NO.:	TITLE:
		APPD: C. T. Tsai	Side Entry Modular Jack
.XX ±0,20	SCALE Free	CHKD:	PART NO.:
		DR: S. K. Liu	310-XXX2-100X1
TOLERANCE		SHEET: 1/1	皇杰興業有限公司 FINE JACK INDUSTRIAL CO., LTD
		REV: A	
		DATE: 07/28/03	