
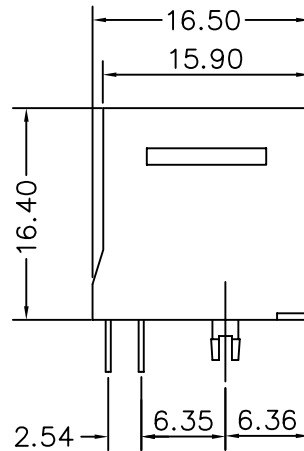


PCB LAYOUT/TOP VIEW

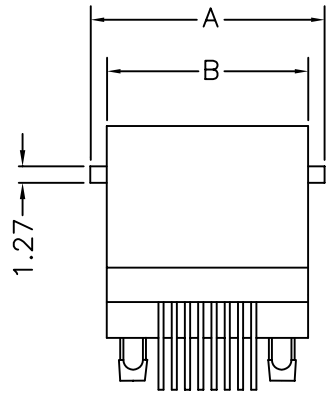

No. of Positions	Dimensions m/m		
	A	B	C
4	13.80	11.36	7.62
6	15.80	13.46	10.16
8/10	17.90	15.40	11.43

SPECIFICATIONS

MATERIAL:

1. Housing : PBT Polyester UL94V0
2. Color : Black
3. Contacts : 0.35mm Thickness Alloy Selective Gold Plating

ELECTRICAL:

1. Current Rating : 1.5 AMP MAX
2. Voltage Rating : 150 VAC MAX
3. Contact Resistance : 30 milliohms MAX, initial
4. Insulation Resistance : 500 Megohms MIN
5. Dielectric Withstanding Voltage : 1000 VAC, 1min

UL. CUL NO.: E166003

Ordering Information

- 330-XXX2-100X1
- No. of Positions: 4,6,8,1(10P)
 - No. of Contacts: 2,4,6,8,1(10C)
 - Gold Plating: 2 - 6u", 3 - 15u", 4 - 30u", 5 - 50u"
 - Panel Stop: 0 - W/O Panel Stop, 1 - W/Panel Stop

.X ±0.3	UNITS	DWG NO.:	TITLE: Top Entry Modular Jack 180°
	mm	APPD: C. T. Tsai	
.XX ±0.20	SCALE	CHKD:	PART NO.:
	Free	DR: S. K. Liu	
TOLERANCE		SHEET: 1/1	皇杰興業有限公司 FINE JACK INDUSTRIAL CO., LTD
		REV: A	
		DATE: 07/28/03	