

SPECIFICATIONS

MATERIAL:

1. Housing : PBT Polyester UL94V0
2. Color : Black
3. Contacts : 0.45mm Diameter Phos-Bronze Plated With Hard Gold
4. Shield : 0.20mm Thickness Copper Alloy With Nickel Plated

ELECTRICAL:

1. Current Rating : 1.5 AMP MAX
2. Voltage Rating : 150 VAC MAX
3. Contact Resistance : 30 milliohms MAX, initial
4. Insulation Resistance : 500 Megohms MIN
5. Dielectric Withstanding Voltage : 1000 VAC, 1min

UL. CUL NO.: E166003

Ordering Information

370S-XXX1-X1XX1

No. of Positions
8,1(10P)

No. of Contacts
2,4,6,8,1(10C)


Gold Plating
1 - 3u"
2 - 6u"
3 - 15u"
4 - 30u"
5 - 50u"

Rear Tabs
0 - W/O Tabs
1 - 1 Tab
3 - 3 Tabs

Grounding Pegs
3 - Rear 3.05
4 - Front 3.05

No. of Ports
1 - 1 Port
2 - 2 Ports
4 - 4 Ports

Ports	Dimensions m/m		
	A	B	C
1	16.10	11.43	15.54
2	31.00	25.40	30.70
4	59.0	53.05	58.70

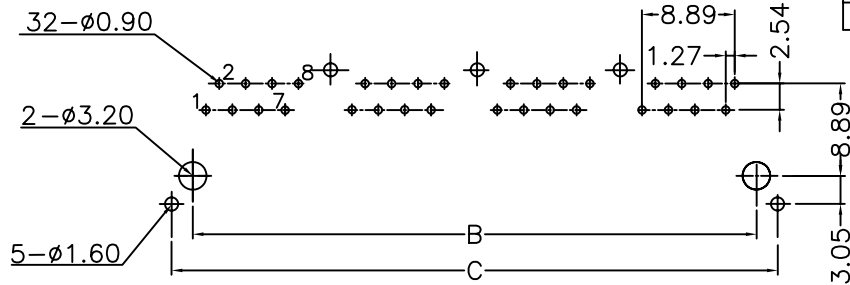

PCB LAYOUT/TOP VIEW

.X ±0.3	UNITS	DWG NO.:	TITLE:
	mm		
.XX ±0.20	SCALE	APPD: C. T. Tsai	PART NO.:
	Free	CHKD:	
TOLERANCE		DR: S. K. Liu	皇杰興業有限公司 FINE JACK INDUSTRIAL CO., LTD
		SHEET: 1/1	
		REV: A	
		DATE: 07/28/03	