

SPECIFICATIONS

MATERIAL:

1. Housing : PBT Polyester UL94V0
2. Color : Black
3. Contacts : 0.35mm Thickness Alloy Selective Gold Plating

ELECTRICAL:

1. Current Rating : 1.5 AMP MAX
2. Voltage Rating : 150 VAC MAX
3. Contact Resistance : 30 milliohms MAX, initial
4. Insulation Resistance : 500 Megohms MIN
5. Dielectric Withstanding Voltage : 1000 VAC, 1min

UL. CUL NO.: E166003

Ordering Information


510-6XX2-X0001

No. of Ports
 1 - 1 Port
 2 - 2 Ports

No. of Contacts
 2,4,6

Gold Plating
 2 - 6u"
 3 - 15u"
 4 - 30u"
 5 - 50u"

| Ports | Dimensions m/m | |
|-------|----------------|-------|
| | A | B |
| 1 | 12.10 | 9.53 |
| 2 | 24.20 | 21.59 |

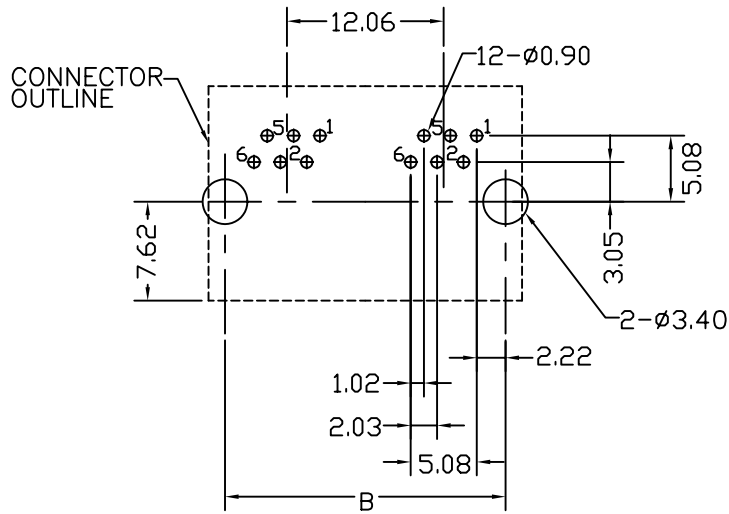

PCB LAYOUT/TOP VIEW

| | | | |
|---------------|----------------|---|--------------------------------------|
| .X ±0.3 | UNITS mm | DWG NO.: | TITLE: 6P Side Entry Modular Jack |
| | | .XX ±0.20 | |
| SCALE Free | | CHKD: | PART NO.: |
| TOLERANCE | | DR: S. K. Liu | 510-6XX2-X0001 |
| | SHEET: 1/1 | 皇杰興業有限公司 FINE JACK INDUSTRIAL CO., LTD | |
| | REV: A | | |
| | DATE: 07/28/03 | | |