


SPECIFICATIONS

MATERIAL:

1. Housing : PBT Polyester UL94V0
2. Color : Black
3. Contacts : 0.35mm Thickness Alloy Selective Gold Plating

ELECTRICAL:

1. Current Rating : 1.5 AMP MAX
2. Voltage Rating : 150 VAC MAX
3. Contact Resistance : 30 milliohms MAX, initial
4. Insulation Resistance : 500 Megohms MIN
5. Dielectric Withstanding Voltage : 1000 VAC, 1min

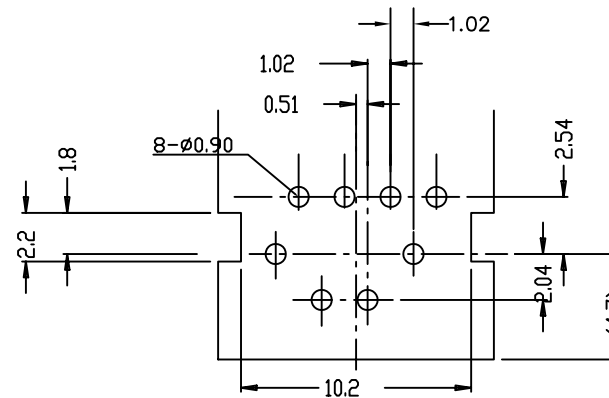

PCB LAYOUT/TOP VIEW

Ordering Information

540A-18X21

- Gold Plating
- 2 - 6u"
 - 3 - 15u"
 - 4 - 30u"
 - 5 - 50u"

| | | | |
|-----------|-------|----------------|--|
| .X ±0.3 | UNITS | DWG NO.: | TITLE: |
| | mm | | |
| .XX ±0.20 | SCALE | CHKD: | PART NO.: |
| | Free | | |
| TOLERANCE | | DR: S. K. Liu | 皇杰興業有限公司 FINE JACK INDUSTRIAL CO., LTD. |
| | | SHEET: 1/1 | |
| | | REV: A | |
| | | DATE: 06/12/06 | |