

**SPECIFICATIONS**




**MATERIAL:**

1. Housing : PBT Polyester UL94V0
2. Color : Black
3. Contacts : 0.35mm Thickness Alloy Selective Gold Plating
4. Shield : 0.25mm Thickness Copper Alloy With Nickel Plated

**ELECTRICAL:**

1. Current Rating : 1.5 AMP MAX
2. Voltage Rating : 150 VAC MAX
3. Contact Resistance : 30 milliohms MAX, initial
4. Insulation Resistance : 500 Megohms MIN
5. Dielectric Withstanding Voltage : 1000 VAC, 1min

UL. CUL NO.: E166003

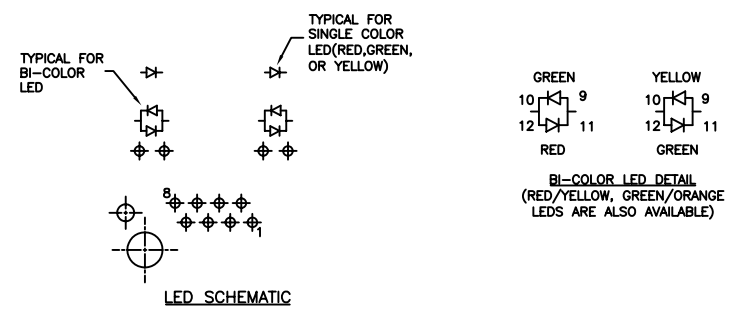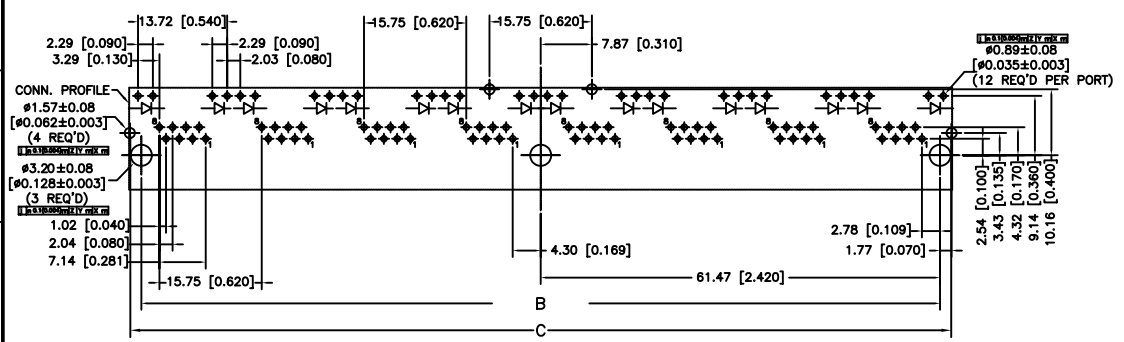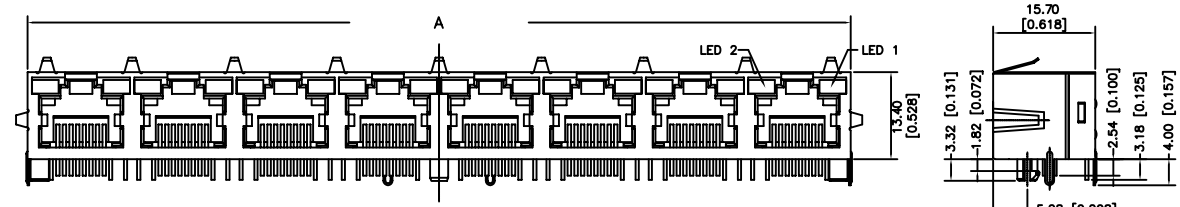

**Ordering Information**

610S-8XX2-XXX21

No. of Contacts  
2,4,6,8

Gold Plating  
2 - 6u"  
3 - 15u"  
4 - 30u"  
5 - 50u"

LED Dash Option  
1 - W/O P.G. Tab  
2 - Top P.G. Tab  
3 - Top & Side P.G. Tab

No. of Ports  
2 - 2 Ports  
4 - 4 Ports  
6 - 6 Ports  
8 - 8 Ports

Ports	Dimensions m/m		
	A	B	C
2	32.20	28.45	32.00
4	63.7	59.95	63.5
6	95.2	91.45	95.0
8	126.7	122.95	126.5

**LED Color Options Table**

LED Color Options		LED DASH OPTION
Position 2(Left)	Position 1(Right)	
No LED	No LED	0
Yellow	Green	1
No LED	Green	2
Yellow	No LED	3
Green	Yellow	4
Green	Green	5
Yellow	Yellow	6
Orange/Green	Orange/Green	7
Yellow/Green	Yellow/Green	8
Orange/Green	Yellow	9

.X ±0.3	UNITS	DWG NO.:	TITLE:
	mm		
.XX ±0.20	SCALE	APPD: C. T. Tsai	PART NO.:
	Free	CHKD:	
TOLERANCE		DR: S. K. Liu	610S-8XX2-XXX21
		SHEET: 1/1	
		REV: A	
		DATE: 07/28/03	皇杰興業有限公司 FINE JACK INDUSTRIAL CO., LTD