



1 2 3 4 5 6 7

A

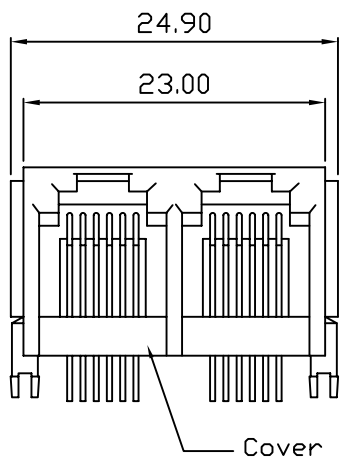

B

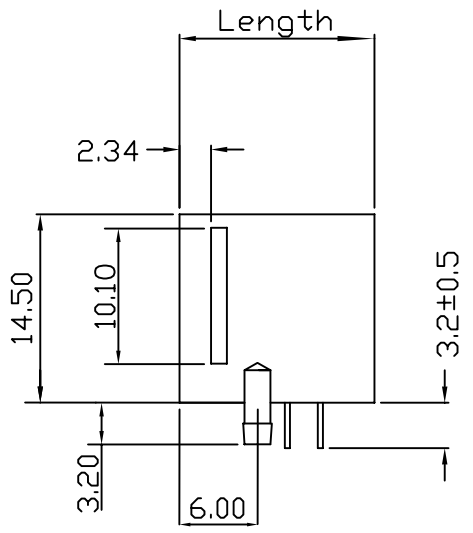

SPECIFICATIONS

MATERIAL:

- 1. Housing : PBT Polyester UL94V0
- 2. Color : Black
- 3. Contacts : 0.45mm Diameter Phos-Bronze Plated With Hard Gold

ELECTRICAL:

- 1. Current Rating : 1.5 AMP MAX
- 2. Voltage Rating : 150 VAC MAX
- 3. Contact Resistance : 30 milliohms MAX, initial
- 4. Insulation Resistance : 500 Megohms MIN
- 5. Dielectric Withstanding Voltage : 1000 VAC, 1min



UL. CUL NO.: E166003

Ordering Information

623KBS2-6XX1-20XX1

No. of Contacts	Length
2,4,6	1 - 14.8
	2 - 13.4
Gold Plating	Cover
1 - 3u"	0 - W/O Cover
2 - 6u"	1 - W/Cover
3 - 15u"	
4 - 30u"	
5 - 50u"	

C

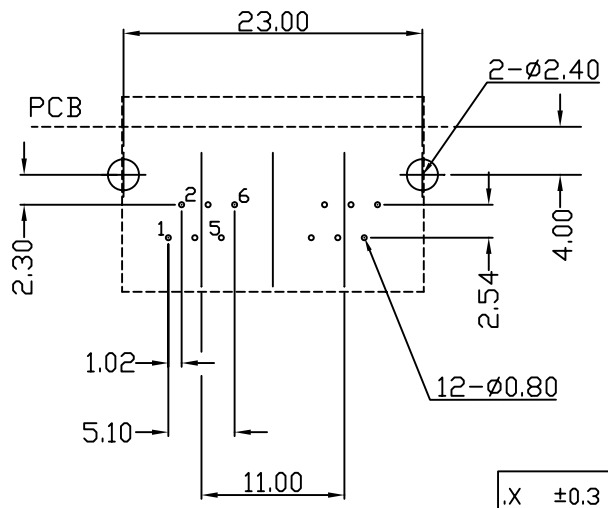

PCB LAYOUT/TOP VIEW

D

E

.X ±0.3	UNITS	DWG NO.:	TITLE:
	mm	APPD: C. T. Tsai	
.XX ±0.20	SCALE	CHKD:	PART NO.:
	Free	DR: S. K. Liu	
TOLERANCE		SHEET: 1/1	皇杰興業有限公司 FINE JACK INDUSTRIAL CO., LTD
		REV: A	
		DATE: 07/28/03	

1 2 3 4 5 6 7