

SPECIFICATIONS

MATERIAL:

- 1. Housing : PBT Polyester UL94V0
- 2. Color : Black
- 3. Contacts : 0.45mm Diameter Phos-Bronze Plated With Hard Gold

ELECTRICAL:

- 1. Current Rating : 1.5 AMP MAX
- 2. Voltage Rating : 150 VAC MAX
- 3. Contact Resistance : 30 milliohms MAX, initial
- 4. Insulation Resistance : 500 Megohms MIN
- 5. Dielectric Withstanding Voltage : 1000 VAC, 1min

UL. CUL NO.: E166003


Ordering Information

623LP-6XX1-100X1

No. of Contacts
2,4,6

Gold Plating
1 - 3u"
2 - 6u"
3 - 15u"
4 - 30u"
5 - 50u"

Panel Stop
0 - W/O Panel Stop
1 - W/Panel Stop

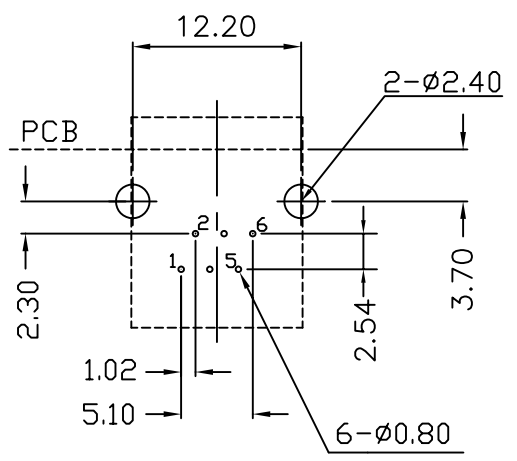

PCB LAYOUT/TOP VIEW

.X ±0.3	UNITS	DWG NO.:	TITLE:
	mm		
.XX ±0.20	SCALE	APPD: C. T. Tsai	PART NO.:
	Free	CHKD:	
TOLERANCE		DR: S. K. Liu	623LP-6XX1-100X1
		SHEET: 1/1	
		REV: A	
		DATE: 07/28/03	
			皇杰興業有限公司 FINE JACK INDUSTRIAL CO., LTD