


1 2 3 4 5 6 7 8 9 10
 1 10 WITHOUT PIN
 2 5 SHORTING BAR
 6 9 SHORTING BAR

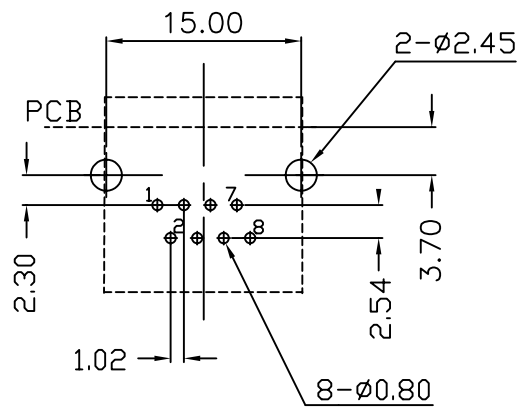

PCB LAYOUT/TOP VIEW

SPECIFICATIONS

MATERIAL:

1. Housing : PBT Polyester UL94V0
2. Color : Black
3. Contacts : 0.45mm Diameter Phos-Bronze Plated With Hard Gold



ELECTRICAL:

1. Current Rating : 1.5 AMP MAX
2. Voltage Rating : 150 VAC MAX
3. Contact Resistance : 30 milliohms MAX, initial
4. Insulation Resistance : 500 Megohms MIN
5. Dielectric Withstanding Voltage : 1000 VAC, 1min

UL. CUL NO.: E166003

Ordering Information

- 623MLP-18X1-100X1**
 Gold Plating
 1 - 3u"
 2 - 6u"
 3 - 15u"
 4 - 30u"
 5 - 50u"

.X ±0.3	UNITS	DWG NO.:	TITLE:
	mm		
.XX ±0.20	SCALE	CHKD:	PART NO.:
	Free		
TOLERANCE		SHEET: 1/1	皇杰興業有限公司 FINE JACK INDUSTRIAL CO., LTD
 		REV: A	
		DATE: 07/28/03	